


CAPTAIN

LOADER – SELF LEVELLING WITH STANDARD BUCKET (1.25m / 4 feet)

CAPTAIN LOADER specifically designed to maximize the performance of the front loader and tractor. They offer a high lifting capacity, perfect for landscaping or light utility work. The Captain Loader operates with single joystick control and has quick & easy attachment and detachment of bucket.

Suitable for Model 283/303 HST

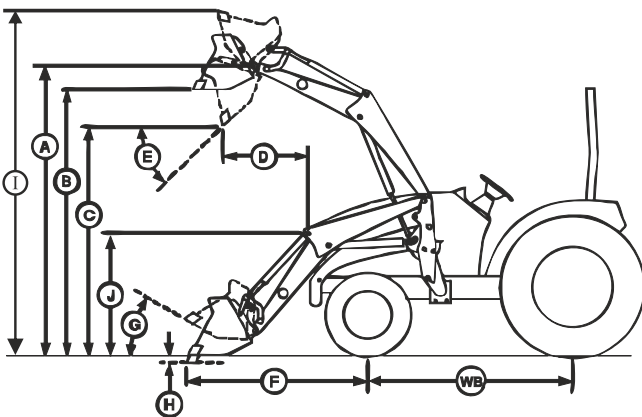

No.	Specification# (Standard Bucket)	For Mechanical Tractors	For Hydrostatic Tractors
		Model L2-5ME	Model L2-5HE
A	Pivot Pin height at maximum, Inch (mm)	93 (2375)	92 (2334)
B	Height bucket parallel to ground at maximum, Inch (mm)	83 (2108)	81 (2068)
C	Bucket fully tilted bottom height, Inch (mm)	69 (1742)	67 (1703)
D	Bucket reach when fully dumped, Inch (mm)	Bonnet - 12 (311) & Hook - 9 (224)	Bonnet - 13 (318) & Hook - 9 (224)
E	Bucket tilt (dump) angle	54°	54°
F	Bucket forward position from front wheel center, Inch (mm)	60 (1534)	60 (1534)
G	Bucket roll back angle at ground level	42°	42°
H	Bucket (parallel) height below ground level (digging depth),Inch (mm)	3 (77)	5 (116)
I	Bucket fully tilted top height, Inch (mm)	104 (2651)	103 (2614)
J	Loader frame front top to ground level, Inch (mm)	40 (1027)	39 (982)
WB	Wheel base, Inch (mm)	59 (1490)	59 (1500)
	Grill guard (bumper - front hood/bonnet)	Standard	Standard
	Bucket width, Inch (mm)	49 (1250)	49 (1250)
	Lift capacity (at pivot pin, max. height), lbs(kgs.)*	1102 (500)	1102 (500)
	Loader weight without attachment, lbs(kgs.)	639 (290)	661 (300)
	Standard bucket weight, lbs(kgs.)	115 (52)	115 (52)

*+/- 5% tolerance variations
*Safe working load 400kg with 300kg counter weight.

Note : Products undergo continuous upgradations. Hence, above mentioned specifications are subject to change without prior notice.
Dimensions are with Agriculture Tyre (F 180/85D12 and R 8.30 x 20).
Counter weight box is optional but recommended for safety & better performance.

Available Different Types of Attachments



Bucket with Grabber



4 in 1 Bucket



Pallet Fork

500 KG
Lift Capacity

Innovation
Shock Absorber



FEATURES



EURO Type Quick Hitch
with Lever




3rd Function Valve



Flow Control Valve
on DCV to Control Dropping Rate
of Loader Boom



Single Joystick with
Positive Locking System
(Comfortable Positioning for Operation)

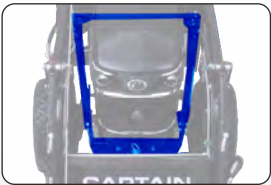

Unique Additional Rectangular
Support Crossbars
all Across the Loader